
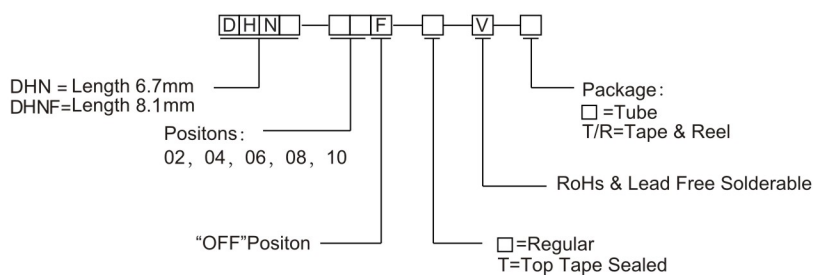


HOW TO ORDER

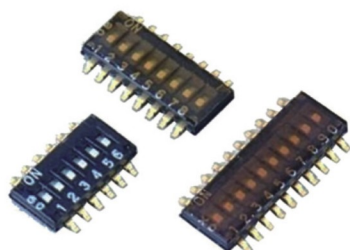

Precaution : For quality assurance , please operate actuators carefully to avoid damage.

SPECIFICATIONS

MENCHANICAL

Mechanical Life:1000 operations
Operations Force:500gf
Stroke:0.6mm

ENVIRONMENTAL

Operation Temperature Range:-40°C to +85°C.
Storage temperature Range:-40°C to +85°C.

ELECTRICAL



Electrical Life:1000 operation cycles
Non-Switching Rating:100mA,50VDC.
Switching Rating:25mA,24VDC.

PACKAGE

DHN (F)-02(-T):125pcs/tube
DHN (F)-04(-T):75pcs/tube
DHN (F)-06(-T):54pcs/tube
DHN (F)-08(-T):40pcs/tube
DHN (F)-10(-T):33pcs/tube
Tape and Reel: DHN series:4000 pcs/reel
Tape and Reel: DHNF series:2500 pcs/reel

DHN (F)-10-V	10	13.93[.548]
DHN (F)-08-V	8	11.39[.448]
DHN (F)-06-V	6	8.85[.348]
DHN (F)-04-V	4	6.31[.248]
DHN (F)-02-V	2	3.77[.148]
(F)PROD. NO.	NO.OF POS	DIM.A

DHN

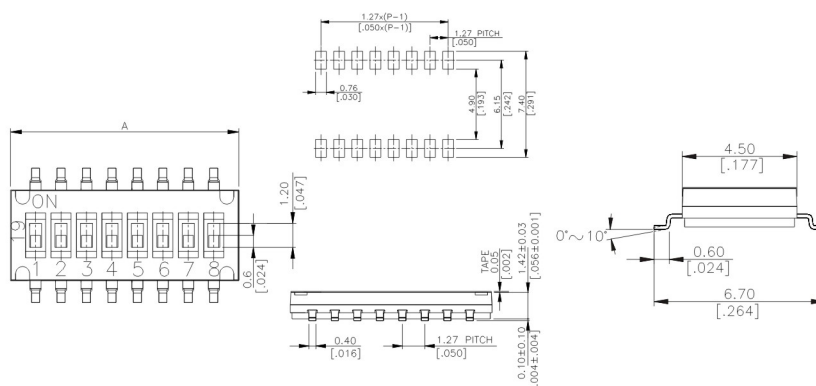

DHNF

